

# 3 Megapixel Bullet Outdoor WDR Camera


- ONVIF Compliance



## Key Features

- 3 Megapixel CMOS, H.264/MPEG 4 / MJPEG triple streaming
- Display 3 Megapixel (Resolution: 2048 x 1536) with 20 frames rate, 1080p (Resolution: 1920 x 1080) with 30 frames rate per second
- All in one integrated with varifocal lens ,with IR CUT
- built in IR LEDs for day night surveillance
- IR distance : 15~25 M
- With SD/SDHC slot for back up / event storage
- Two way audio
- Power Over Ethernet
- Video Output
- Digital 10X zoom
- ONVIF compliant protocol
- Compatible with third party software or Maxiwatch professional
- With Blower
- Free Bundle Maxiwatch Lite 64 Channel Recording Software Provided
- Support Maxi-Watch Professional IP software
- ONVIF Compliance

## Mechanical Dimension

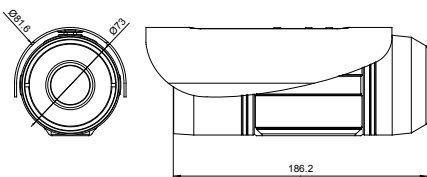

## Technical Specifications

Model		ACM-R3002	
Hardware	CPU	TMS320dm368	
	RAM	128MB	
	Flash	128MB	
	Image Sensor	1/3" CMOS	
	Lens Type	Varifocal 3.3 ~ 12mm, F1.4	
	Angle of View	H 79.3 ~ 29.8	
	Minimum Illumination	0.1 Lux @F1.2 / 0 Lux IR On	
	IR LED	4 LEDs	
	IR Distance	25 Meters	
	Alarm	1 in / 1 out	
	BLC	Auto	
	AGC	Auto	
	AWB	Auto/ outdoor/ night/ Tungsten	
	Video	Image Compression	H.264
MPEG4			30fps @ 1920 x 1080; 1200; 1280 x 720; 720 x 480; 320 x 240
MJPEG			30fps @ 1280 x 720; 720 x 480; 320 x 240
Triple Streaming		Yes	
Image Snapshot		Yes	
Privacy Masking		Yes	
Video Bit Rate Adjust		Yes, adjust by bitrate	
Motion Detection		Yes, 3 different areas	
Sensor Detection		Yes	
Triggered Action		Mail, FTP server, Save to SD card	
After event process		JPEG image upload to over FRTP, SMTP(email server)	
Pre/Post Alarm		Pre alarm 2 sec / Pose alarm 5 sec	
Security		Multi-level passwords , IP filtering, HTTPS	
Audio		Simultaneous Connection	15 users
	Mobile Viewer	iPhone / Android App	
	Audio Streaming	Two way audio support	
	Audio Compression	G.711	
Wired or Wireless	Audio input	Input x1	
	Audio output	Output x1	
Network	Ethernet	10/100 Base-TX RJ45	
	Protocol	TCP/IP, IPv4, IPv6, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, HTTPS, Samba, PPPoE, UPnP, Bonjour, RTP, RTSP, RTCP	
Software	Viewing System Requirements	Browser IE 7.0 or above Firefox 3.0 Safari Google Chrome	
	SDK	Yes	
	Video Management Software	MaxiWatch Lite 64ch	
Mechanical	Waterproof	IP66	
	Blower	-10°C ~ 50°C	
	Operating Temperature	20% ~ 80%	
	Humidity	Ø83mm x H180mm	
	Dimensions	1000g	
	Weight	DC12V / POE (IEEE802.3af)	
	Power	DC12V & Power Over Ethernet IEEE802.3af	
	Power Consumption	Yes	

● Specifications are subjected to change without prior notice.