2.4~2.5GHz Omni Antenna 12dBi

AOA-2412 antennas are professionally engineered and manufactured with the highest industry quality at the lowest possible price providing extreme value.

AOA-2412 is designed for the 2.4GHz ISM band, supporting 2.4 to 2.483 GHz and provides superb performance in IEEE 802.11b/g WiFi and Bluetooth applications.

AOA-2412 includes mounting bracket and hardware for up to 2" masts. Made with fiberglass and comes with an integrated N Female

Applications:

2.4 - 2.5 GHz ISM Band IEEE 802.11b, 802.11g, 802.11n Wireless LAN Directional and multipoint applications Bluetooth Public Wireless Hotspot WiFi, RFID Wireless Video Systems



Features:

Superior performance
Light weight
All weather operation
DC Short lightning protection
Installed for vertical
Includes tilt and swivel mast mount
In accordance with customer needs to change the color or features

Model	AOA-2412
Frequency	2.4-2.5GHz
VSWR	≤ 1.5
Gain	12dBi
Polarization	Vertical
Power Handling	50 Watts
Impedance	50 Ω
Beam Width	H: 360° / V: 8°
Connector	N Female
Operation Temp	-40°C ~ +80°C
Dimension	1130*70 mm
Mounting	32 ~ 45 mm (1.2 ~1.75 inch)
Weight	600a

For further details:

Alfa Network Inc.,

4F-1 No. 106, Rueiguang Rd.,

Neihu District,

Taipei City, Taiwan.

http://www.alfa.com.tw

sales@alfa.com.tw


Tel:+886-2-27968477

Fax:+886-2-27968478




2.4~2.5GHz Omni Antenna 12dBi

Network Analyzer Test Report

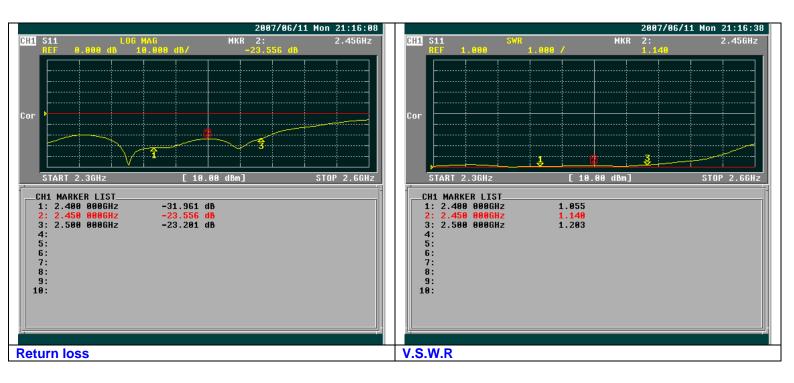


2.4~2.5GHz Omni Antenna 12dBi


RF Chamber Test Report Frequency: 2.4 ~ 2.5GHz

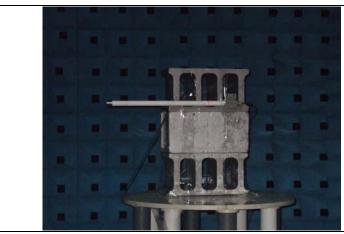



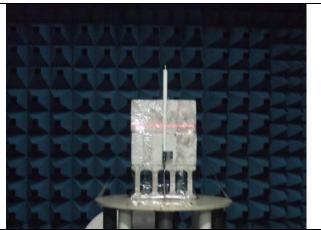

Horizontal Pattern Photos

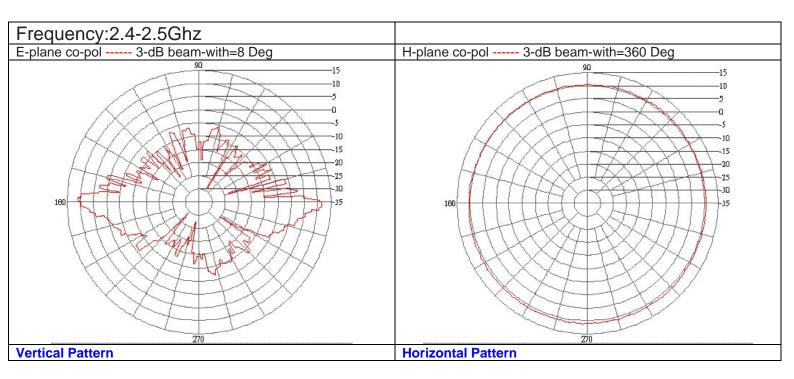

2.4~2.5GHz Omni Antenna 12dBi

Mounting Kits Install Guide

