

**FIBER OPTIC FACEPLATE BOX
SPECIFICATION**

GFX-03B



SPECIFICATION

MODEL	Dimension (L×Wmm)	Adapter Type	Max. Capacity	N.W. (kgs)	Material
GFX-03B	240*140*40mm	SC APC SC UPC	4FO	1.6	ABS

ORDERING INFORMATION

- ① Empty Box without Adapters
- ② Box full with 4pcs SC APC SM SX Adapter
- ③ Box full with 4pcs SC UPC SM SX Adapter
- ④ Box full with 4pcs SC APC SM SX Adapter+4pcs Pigtailes
- ⑤ Box full with 4pcs SC UPC SM SX Adapter+4pcs Pigtailes


DESCRIPTION

The equipment is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building.

FEATURES

- 1) With protective doors, Dust Proof.
- 2) Suitable for many types of modules, used in cabling work area subsystem.
- 3) Embedded type surface, easy for installation and removal.
- 4) Available for fiber optical SC simplex or LC duplex and can be used in both surface mounted installation and concealed panel installation
- 5) All modules are solderless mode.

Application

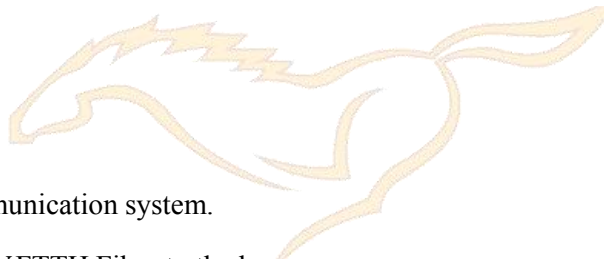

- 1). Optical fiber communication system.
- 2). Fiber optical CATV, FTTH Fiber to the home.
- 3). Optical fiber access network.
- 4). Testing instruments, fiber optical sensors.
- 5). Fiber optical patch panel, cabinet type or wall-mounted type fiber optical distribution system.