

**FIBER OPTIC DISTRIBUTION BOX
SPECIFICATION[®]**

TUOLIMA

GFX-11B






Description

The equipment is used as a termination point for the feeder cable to connect with drop cable in FTTx communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building.

ITEM	Dimension (L×W×H mm)	Material	Max. capacity	Optical cable ports	Color
GFX-11A	330*260*130	PC+ABS	24Core	4- φ 20mm	White/Black/Light Gray

TYPE ONE-Can install adapter and mini PLC Splitter

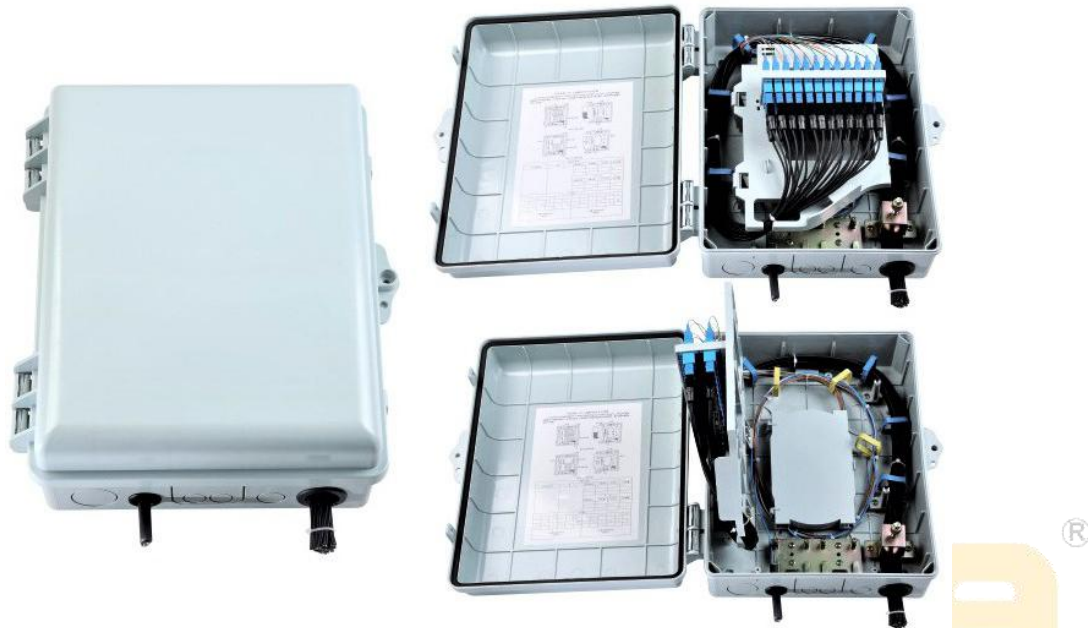

TYPE TWO-Can install Insert PLC Splitter



ORDERING INFORMATION

- ① Empty Box without Adapters
- ② Box full with 24pcs SC SM SX Adapter
- ③ Box full with 1pcs 1:16 PLC Mini Splitter and 16pcs Adapters
- ④ Box full with 1pcs Insert 1:16 PLC Splitter

Application

- 1) Widely used in FTTH access network.
- 2) Telecommunication Networks
- 3) CATV Networks
- 4) Data communications Networks
- 5) Local Area Networks

