

**IN-LINE TYPE  
FIBER OPTIC CLOSURES  
SPECIFICATION**

**GJS-301**

## ❖ PICTURES




## ❖ SPECIFICATION

Fiber Optical Splice Closure is provided with a protective device for optical fiber connection, fiber optic cable seal and mechanical strength continuity. With the integrity of the restoration of optical fiber cable protection, the electrical connection of the metal components in the optical cable, the earthing or disconnection, and the fiber optic cable fitting from the environment, can be placed in the optical fiber connector and storage of the fiber and other functions.


## ❖ FEATURES

Characteristics	Value/Performance
Cable Port	2
Cable Diameter	14mm/12mm
Dimension	280×200×95mm
Weight	1.2~1.5Kg
Operating Temperature	-40 ~ +60°C
Fiber Bend Radius	30mm
Splice Trays	4
Max. Capacity	48

❖ **Structural Drawing**

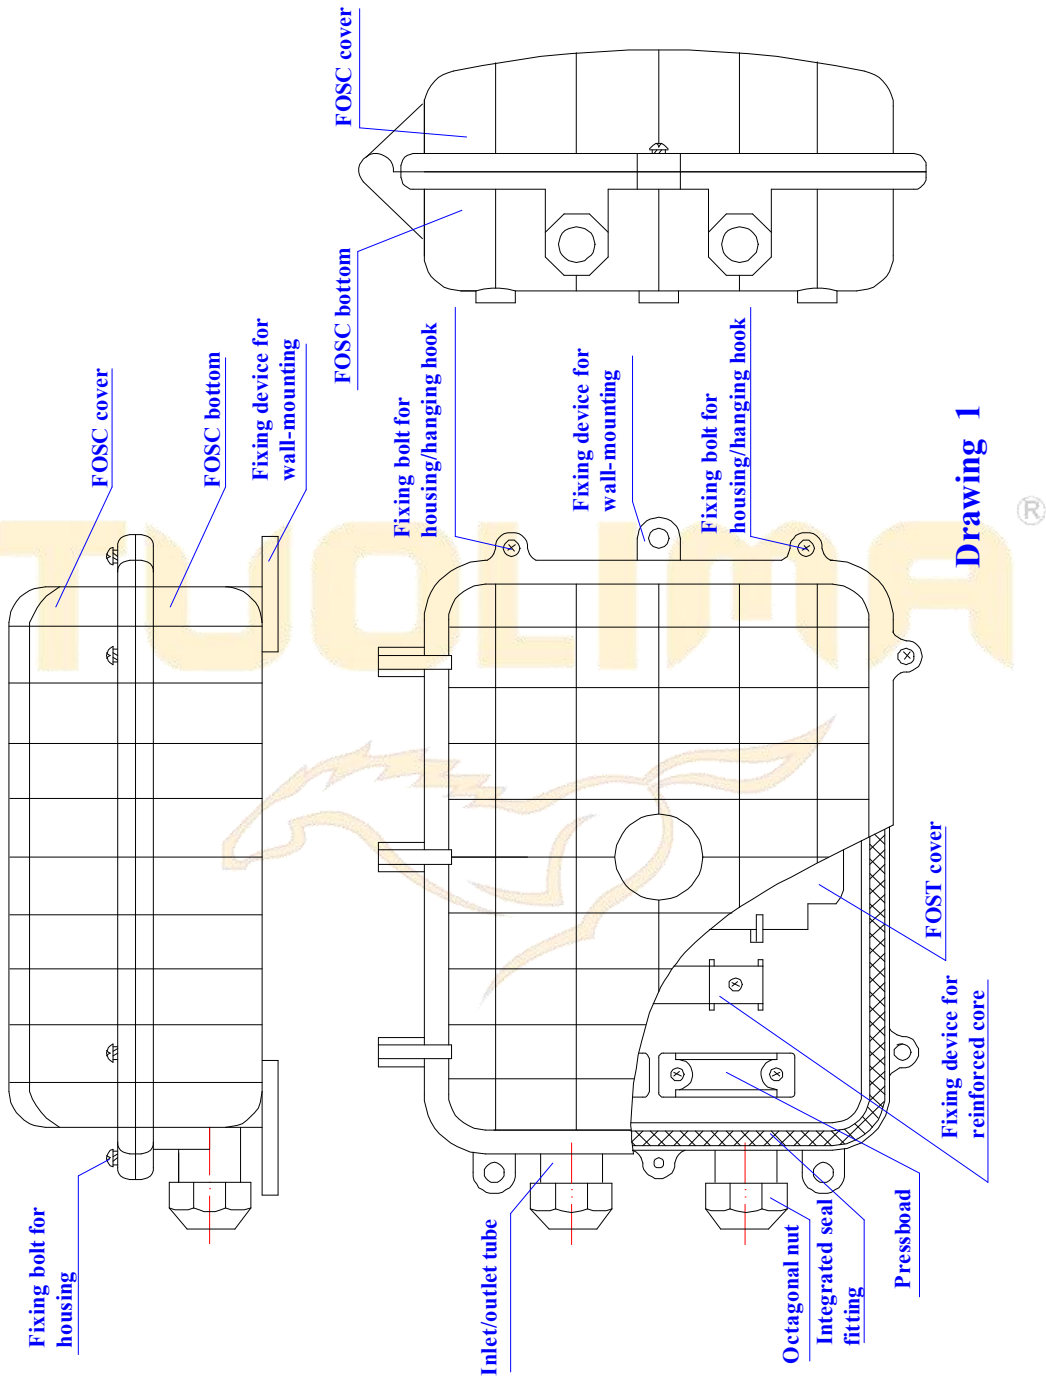

**Drawing 1**

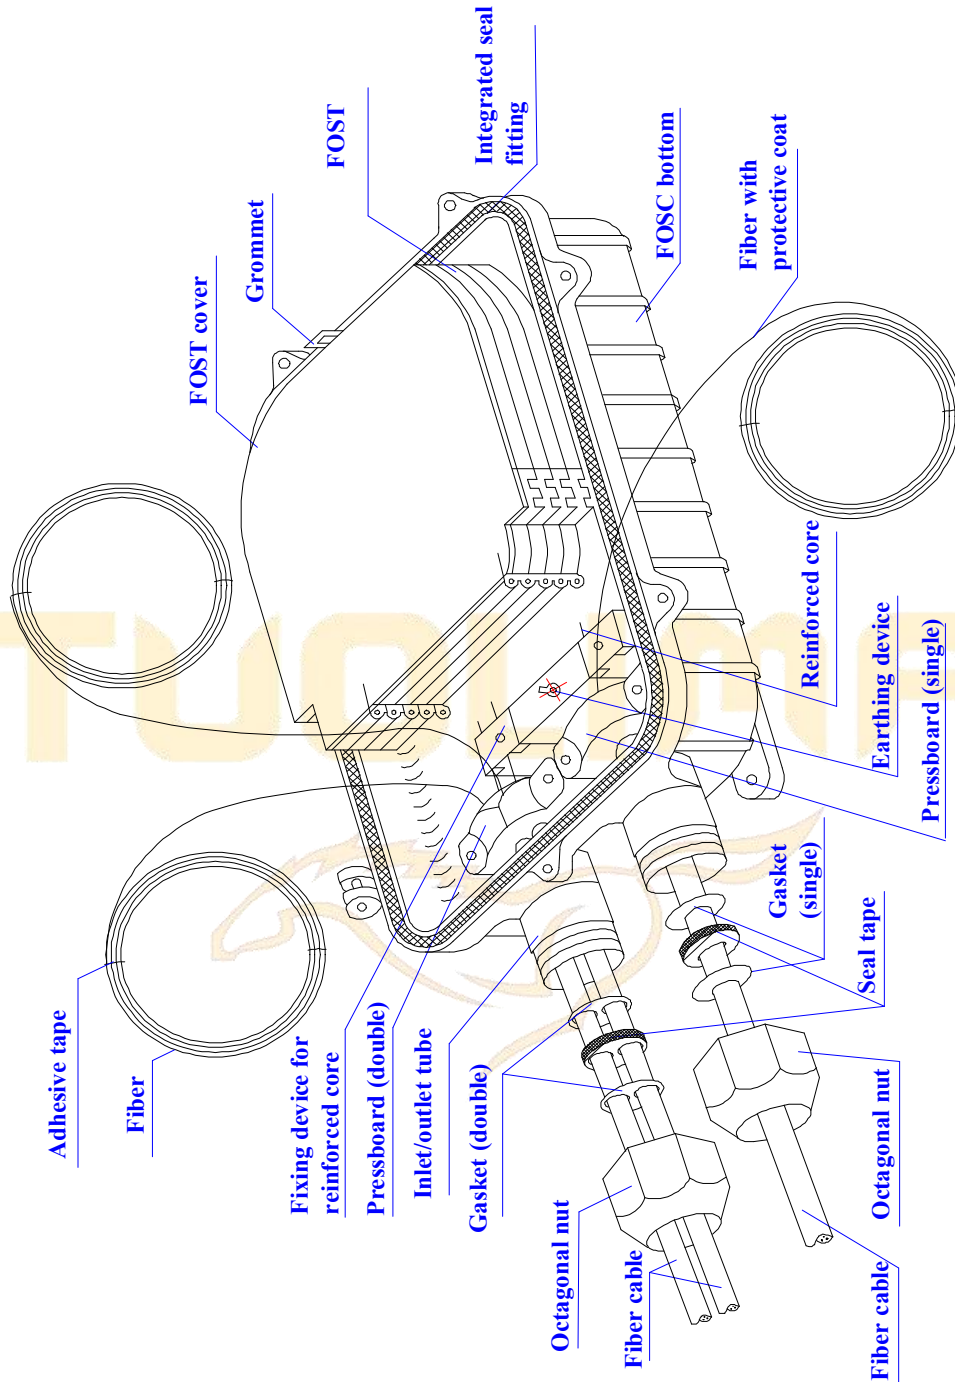

**Drawing 5**

❖ **PRODUCT FEATURES**

- Reliable gasket sealing
- Easy installation with no special tool required
- Re-enterable with no re-entry kit needed
- High compressive strength

❖ **APPLICATION**

- Suitable for ribbon and non-ribbon fibers
- Aerial
- Cable duct
- Direct burial
- Wall-mounted

**TUOLIMA**<sup>®</sup>

