


# S/FTP Cat. 6A LSZH patch cord, white, 0.5 m

PP6A-LSZHCU-W-0.5M

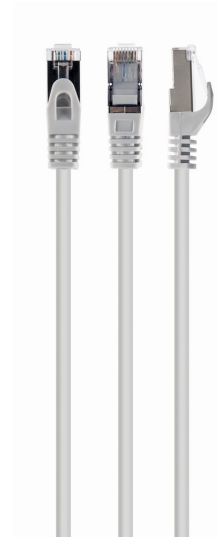

- Perfect connection
- Dual shielded for a reliable connection
- Low Smoke Zero Halogen (LSZH) jacket
- Gold plated contacts

## Features

- Patch cord with foil shielded pairs and braided cable, CAT 6A
- Gold plated contacts
- Low Smoke Zero Halogen (LSZH) jacket
- Molded strain reliefs
- Snagless boots

## Packaging

Q'ty in crtn, pcs	300
Crtn volume, CUM	0.041
Crtn weight, kgs	7.72
Individual package size LxWxH:	170x125x10 mm
Carton size LxWxH:	400x300x340 mm
Country of origin	CN
Barcode	8716309118767
Customs code	8544421000

## Certificates



## Specifications

Category: category 6A  
Type: SSTP (dual shielded)  
Frequency bandwidth: Max. 500 MHz  
Compliance with ANSI / TIA / EIA-568B standards  
Conductor: AWG 27 (7 x 0.135 mm wire), CU  
Conductor insulation: FM-PE 1.0 mm  
Shielding: AL foil + braid shield (16 x 4/0.12 mm)  
LDPE filler: yes  
Polyester tape: yes  
Drain wire: n/a  
Jacket material: LSZH  
Jacket braiding: n/a  
Jacket outer diameter: 6.2 mm  
Length: conform item description  
Color: conform item description