

Login to device

1. To enter router's Web interface type http://192.168.1.1 in your internet browser. 2. Use the following parameters when prompted for authentication:

(http://192	168.1.1	Ċ
	Authorization Required	
	Please enter your username and password	
	Username admin	
	Password admin01	
	Login	

3. Configuration Wizard will start after logging in. It is necessary to complete Configuration Wizard to setup router to correct mode. You can leave default settings but it is strongly recommended that you change the password and enable Wireless Security.

4. Go to Status > Network and pay attention to Signal Strength. To maximize the performance try adjusting antennas or changing location of your device to achieve best signal conditions.

Mobile WAN LAN Wireless OpenVPN				
Mobile Information				
Mobile				
Data connection state	Connected			
IMEI	860461024004296			
Sim card state	ОК			
Signal strength	-44 dBm			

This sign on the package means that it is necessary to read the User's Manual before you start using the




This sign on the package means that all used electronic and electric equipment should not be mixed with general household waste.

CE

device.


Hereby, Teltonika declares that this RUT230 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC

Please visit our web site www.teltonika.lt for more information





Front panel		Back panel			
3 9 10	1 2 3 4 • LAN2 7 • LAN3 8 • WAN (1) 12		Le 3 WiFi WiFi KiFi WiFi		
1, 2, 3	LAN Ethernet ports	1, 2	LTE antenna connectors		
4 5, 6, 7	WAN Ethernet port LAN LEDs	3, 5 4	WiFi antenna connectors Reset button		
5, 0, <i>1</i> 8	WANLED	4	Reset button		
9	Power socket				
10	PowerI FD				
11	GSM connection status LED				
12	GSM signal strength indication LEDs				
Hardware installation 1. Remove back panel and insert SIM cards which were given by your ISP (Internet Service Provider). Correct SIM cards' orientation is shown in the picture.					

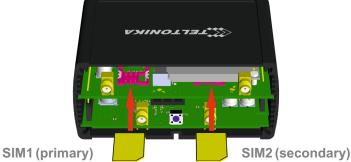



2. Attach LTE and WiFi antennas.

3. Connect the power adapter to the socket on the front panel of the device. Then plug the other end of the power adapter in to a wall outlet or power strip.

4. Connect to the device wirelessly (SSID: Teltonika_Router) or use Ethernet cable and plug it in to any LAN Ethernet port.

Configure your computer (using Windows)





Properties).

Internet Protocol Version 4 (TCP/IPv4) Properties

Obtain an IP address automatically

Obtain DNS server address automatically

Advanced...

Cancel

ОК

General Alternate Configuration

Select Obtain IP address automatically and Obtain DNS server address automatically if they are not selected. Click OK.

